



RAW WATER OUTPUT\*

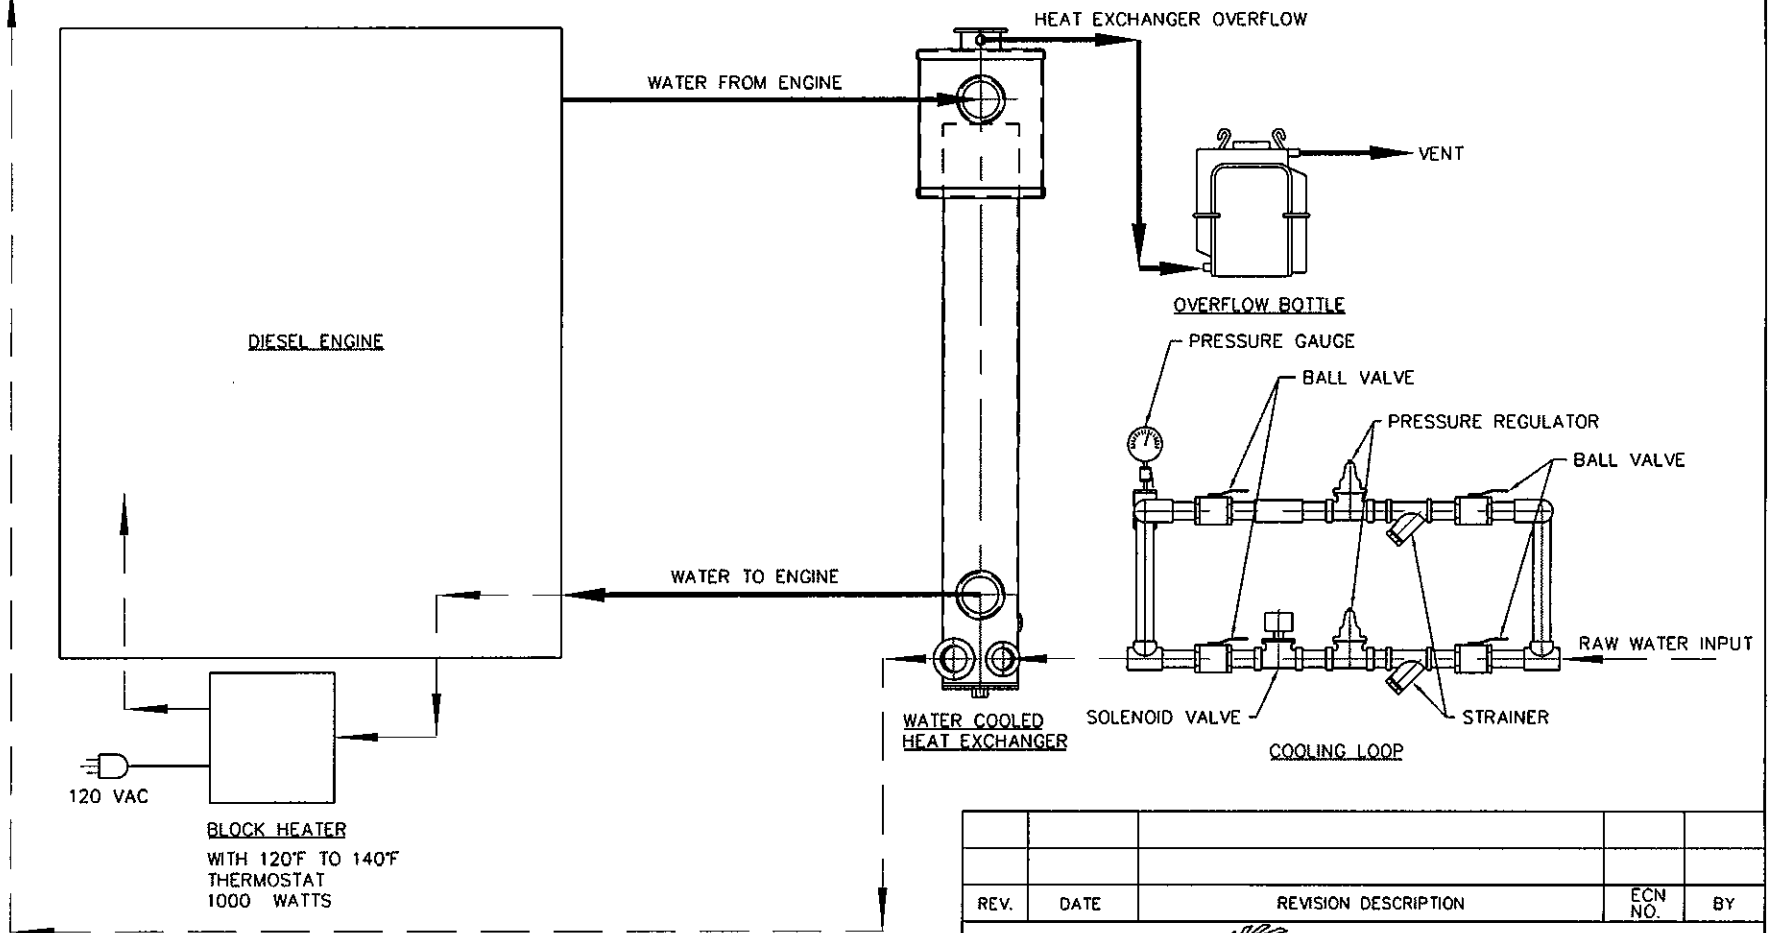

\* RAW WATER DISCHARGE MUST BE EQUAL TO OR HIGHER THAN HEAT EXCHANGER TANK AND HAVE AN OPENED DISCHARGE SO THAT RAW WATER IS NOT DRAINED OR SIPHONED FROM THE HEAT EXCHANGER.

REV.	DATE	REVISION DESCRIPTION	ECN NO.	BY
				2441 SE STUBB STREET MILWAUKIE, OREGON 97222 PHONE: 503-659-4198
TITLE: COOLING SCHEMATIC FOR HEAT EXCHANGER DIESEL ENGINES				
MATERIAL:				
FINISH:				
TOLERANCES U.O.S.:				
FRAC.=±1/16    ANGLE=±1°    X.X=±.030    X.XX=±.015    X.XXX=±.005				
DATE DRAWN:	DRAWN BY:	CHECKED BY:	APPROVED BY:	SCALE:
1-10-00	DHB			NONE
SALES ORDER NUMBER:		DRAWING NUMBER:		REVISION:
		C-1215		

THIS DRAWING IS THE PROPERTY OF EDWARDS MANUFACTURING AND THE INFORMATION CONTAINED HEREIN IS CONFIDENTIAL. THIS DRAWING AND ALL COPIES MUST BE RETURNED TO EDWARDS MANUFACTURING IMMEDIATELY UPON REQUEST.