




# MODELS

## TSD-25 & TSD-50


### Pump Specifications

*Approximate Overall Dimensions:*

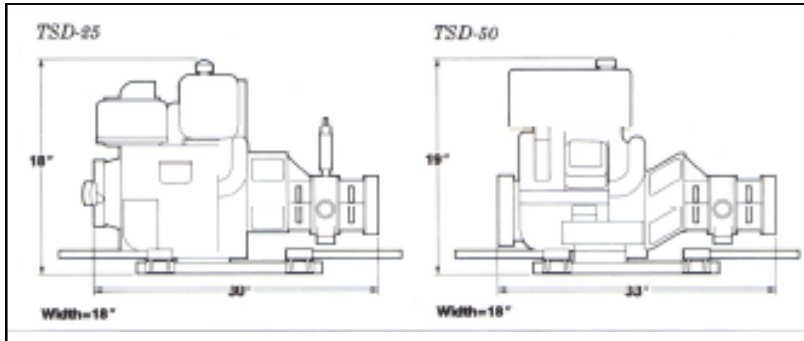

Average weight TSD-25 - 122# manual, 132# electric  
Average weight TSD-50 - 148# manual/electric

*Performance Characteristics*

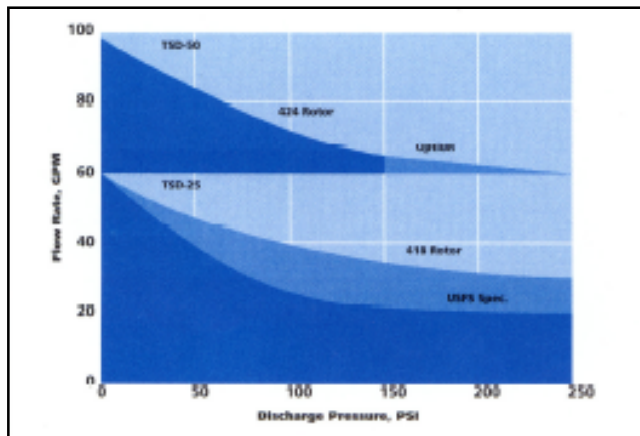

*Other rotor sizes available*

#### Materials of construction

Standard: Aluminum body with bronze internals

#### Options

All bronze construction, steel internals

#### Sealing

Packing box or lip seal

#### Temperature

250°F maximum, higher temperature available, contact factory

#### Discharge pressures

TSD-25 - Standard duty-to 250 psig  
Optional-to 300 psig or higher  
TSD-50 - Standard duty-to 150 psig  
Optional-to 250 psig

#### Horsepower

TSD-25 - 11 hp gasoline  
TSD-50 - 18 hp gasoline  
Optional-Diesel engine drive and higher horsepower gasoline

#### Standard unit

Handles for carrying unit with attached fuel tank, mounting rails, USFS spark arrestor

#### Options

Pressure gauge, pressure relief valve, set of caps and chains, suction hose, discharge hose and accessories

Edwards Manufacturing manufactures pumps to adapt to existing or new drive equipment. We custom build complete pumping packages. Our expertise includes complete assemblies with motors, engines, pumping skids and electrical apparatus with controls. Please feel free to contact us regarding your requirements.